

KV2 LISA 6 SÜSTEEMI V4 VENTILAATOR LEHT 1

SILENT.



5210418900 - SILENT-300 CRZ (220-240V 50)

RE



Axial extractor offering very low noise level, pilot light, back draft shutter, 1-30 min timer and ball bearings, IP45, class II, with thermal protection and W/O Electronic Humidistat, to work at temperatures up to 40°C, white color, to connect at 230V.

Theoretical Working Point

Airflow	-
Static Pressure	-
Temperature	20 °C
Altitude	0 m
Density	1.2 kg/m ³
Frequency	50 Hz
Voltage	1-230V-50Hz


Construction

Diameter	146 mm
Fan size	300
Weight	1.25 kg

Motor Characteristics


Number of poles	2
Voltage	1-230V-50Hz
Maximum absorbed current	0.2 A
IP Rating	IP45
Motor insulation class	

Drawing

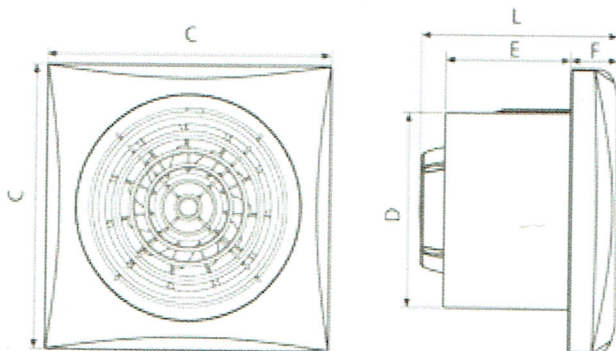

A	C	D	E	F	L
214	214	146,5	95	35,5	148,8

Performance Chart

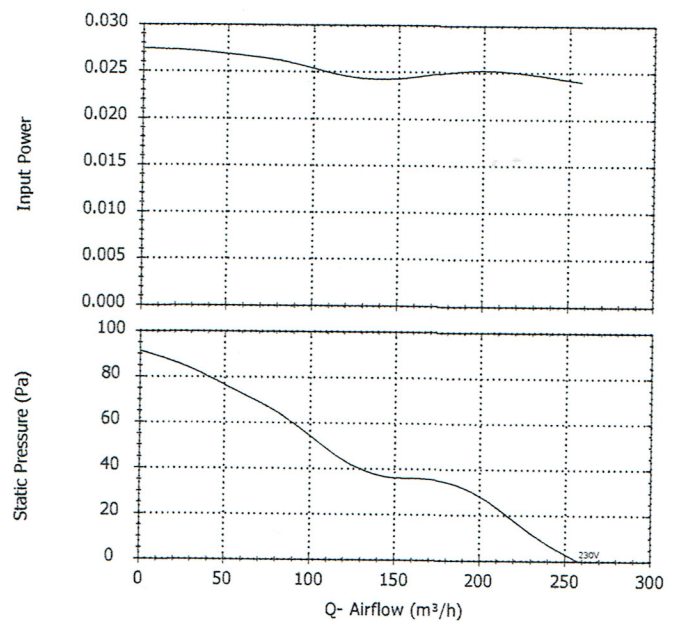

KV2 LISA 6 SÜSTEEMI V4 VENTILAATOR LEHT 2

Kirjeldus \ Mudel	CZ	CRZ	CHZ	CDZ	CZ 12V
Märktuli	•	•	•	•	•
Tagasilöögiklapp	•	•	•	•	•
Mootori mürasummutusplokk	•	•	•	•	•
Kuullaagrid	•	•	•	•	•
Aegrelee (1-30 min)		•	•	•	
Seadistatav hügrostaat			•		
Liikumisandur				•	
12V toitepinge					•

Silent CRZ



See mudel sisaldab järeltuulutuse taimerit, mis võimaldab jätkata ventilaatori töötamist eelnevalt seadistatud aja vältel pärast lülitist väljalülitamist.

Ühendamine valgusti lüliti abil -


Timeri seadistamiseks on skeemiplaadil potentsiomeeter,

Aja vähendamiseks pöörake skeemiplaadil asetsevat potentsiomeetrit vastupäeva, minimaalne aeg on 1 minut.

Aja suurendamiseks pöörake skeemiplaadil asetsevat potentsiomeetrit päripäeva, maksimaalne aeg on 30 minutit.

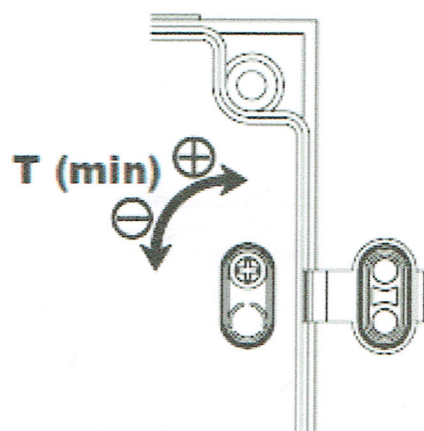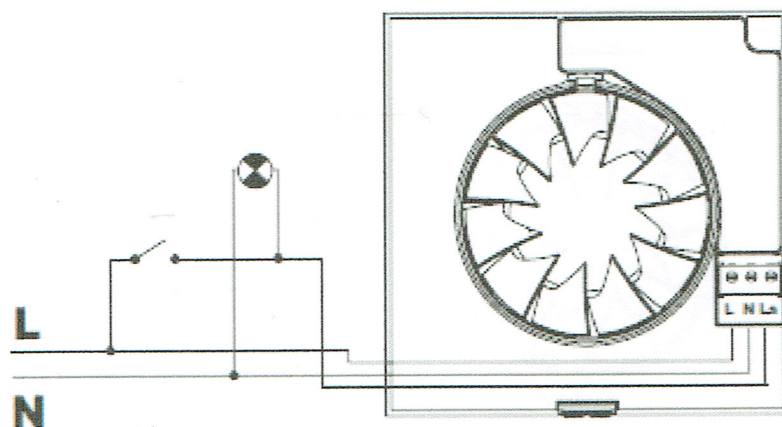

SILENT CRZ
~~SILENT CDZ~~

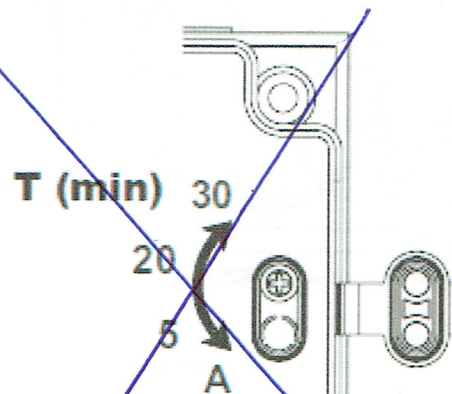

~~SILENT CRIZ~~